

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04B 7/26		A1	(11) International Publication Number: WO 92/10886
			(43) International Publication Date: 25 June 1992 (25.06.92)
(21) International Application Number: PCT/FI91/00365 (22) International Filing Date: 29 November 1991 (29.11.91) (30) Priority data: 905995 4 December 1990 (04.12.90) FI (71) Applicant: TELENOKIA OY [FI/FI]; Mäkkylän puistotie 1, SF-02600 Espoo (FI). (72) Inventors: PAAVONEN, Tapio ; Myllytie 7 A 5, SF-43100 Saarijärvi (FI). TÖYRYLÄ, Hannu ; Vaahtokuja 6 D 33, SF-01600 Vantaa (FI). TIURANIEMI, Riitta ; Toinen Linja 23 A 7, SF-00530 Helsinki (FI).		(74) Agent: OY KOLSTER AB; Stora Robertsgatan 23, P.O. Box 148, SF-00121 Helsinki (FI). (81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE, DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB, GB (European patent), GR (European patent), IT (European patent), LU (European patent), NL (European patent), SE (European patent). Published With international search report.	

(54) Title: A RADIO SYSTEM

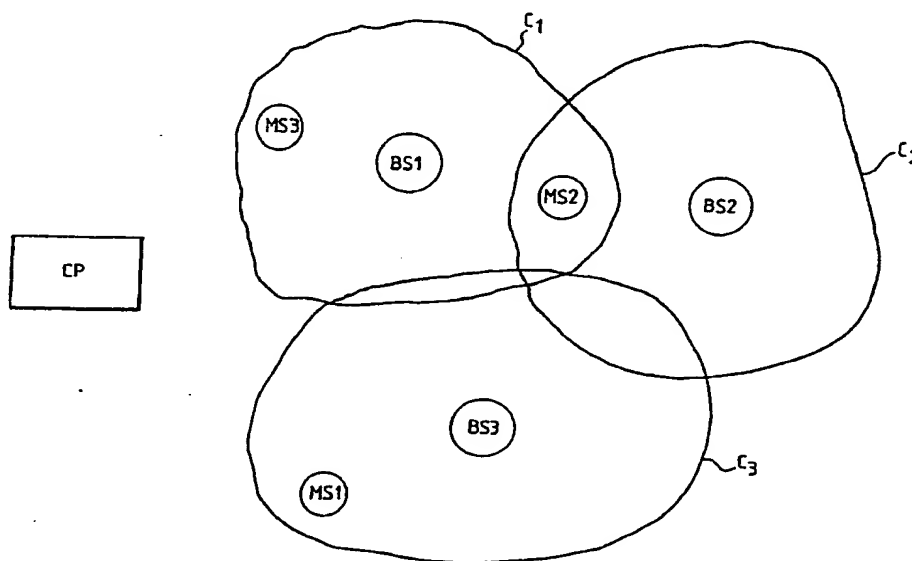

BEST AVAILABLE COPY

(57) Abstract

The invention relates to a radio system comprising several base stations (BS1, BS2, BS3), at least one mobile station (MS1, MS2, MS3), and at least one frequency channel serving as a control channel and time-shared between several base stations for the transmission of control signalling. Said at least one mobile station (MS1, MS2, MS3) measures the signal strength of signalling transmitted by the adjacent base stations on the same and/or another control channel between the signalling periods of its current base station (BS1, BS2, BS3). At the end of the signalling period the base station transmits information on the length of the signalling break during which the mobile stations can measure the signalling of the adjacent stations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU ⁺	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE*	Germany	MC	Monaco	US	United States of America
DK	Denmark				

+ Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

A radio system

The invention relates to a radio system comprising several fixed radio stations positioned apart from each other within a coverage area of the radio system, and at least one mobile radio station signalling with a single fixed radio station at a time, the system further comprising at least one frequency channel serving as a control channel and time-shared between several fixed radio stations for the transmission of control signalling.

In certain mobile radio systems, one frequency channel is shared on a time basis between several fixed radio stations i.e. base stations which transmit on this control channel sequentially in turns. Such a system is used when the number of the available radio channels is limited and the radio traffic is light. In a mobile radio system of this type, each mobile radio station, e.g. mobile telephone, responds only to the control signalling of the particular base station with which it is currently registered and normally signals back towards the system (exchange) only during the reception of the control signal of this base station. If, however, the level of the signal of the current base station is no longer sufficient, the mobile radio station selects a new base station on the basis of the strength of control signals it receives from the other base stations, and registers with the selected base station. It may thereby take a very long time before a suitable new base station is found by means of the signal strength measurements when the current base station has to be abandoned. The problem is aggravated by the fact that the system utilizes time-shared control channels, as it is highly probable that when a mobile station has

selected a certain time-shared control channel for a signal strength measurement, there is a signalling break on the selected channel, and so there is no control signal to be measured. On the other hand, if
5 a mobile radio station waits on the channel until the signalling break ends, plenty of time is spent on control channels with no control signal, which increases the time required for hunting a new base station. The problem becomes even worse with in-
10 creasing number of base stations and control channels.

The object of the invention is provide an improvement in a radio system of this type.

The improvement is achieved by means of a radio
15 system of the type described in the introduction, wherein said at least one mobile radio station measures the signal strength of signalling transmitted by the other fixed radio stations on the same and/or another control channel between the
20 signalling periods of its current fixed radio station, and that at the end of the signalling period of each fixed radio station, information is transmitted on the length of the period of time the mobile station has for measuring the signalings of the
25 other fixed radio stations before a subsequent signalling period of the same fixed radio station.

In the invention, the mobile radio station utilizes the signalling breaks of its current base station which inevitably occur on the time-shared
30 control channel for measuring the field strengths of adjacent base stations and storing the measuring results. When the mobile radio station has to change the base station, it can utilize these prestored measuring results in the selection of a new base
35 station, and so the procedure for changing the base

station (a hand-over procedure) can be carried out more rapidly. This is an advantage especially when it is necessary to change the base station in connection with a call set-up situation. The signalling of each
5 base station contains data on the length of the period during which the mobile radio station can measure the signalling of the other base stations before the start of a signalling period of this particular base station. This is an advantage
10 especially when the length of the signalling period assigned to the base station on the control channel is dynamically variable so that an optimal call set-up time is obtained in different situations.

In the following the invention will be
15 described in greater detail by means of an illustrating embodiment with reference to the attached figure, which shows one possible radio system in which the invention can be applied.

Figure 1 shows a mobile radio system in which
20 the geographical area covered by the system is divided into smaller radio areas or radio cells C1, C2 and C3, preferably in such a way that the peripheral portions of adjacent cells overlap. Frequency channels are allocated to the cells for speech or
25 data calls so that at least neighbouring cells utilize different frequencies. Each cell C1, C2 and C3 comprises at least one fixed multi-channel transceiver equipment BS1, BS2 and BS3, called a base station herein. All the base stations BS1, BS2 and
30 BS3 are coupled to a system controller CP, which controls the operation of the entire system.

For control signalling, such as call set-up signalling, the base stations BS1, BS2 and BS3 in the system have a common frequency channel as a control
35 channel, and they use this frequency channel

sequentially on a time-sharing basis for the transmission of their control messages or signalling bursts. The system may comprise several base station groups each having their own control channel. The signalling sequence on the control channel starts from a certain base station and terminates in a pause before the sequence is restarted with the transmission of the signalling burst of the same base station. In the preferred embodiment of the invention, signalling bursts transmitted on the control channel comply with the MPT standard 1327 issued by the British Department of Trade and Industry. Thus each signalling burst is preceded by a pause during which none of the base stations BS transmits on the control channel. Each signalling burst contains a frame which begins with the fields LET, PREAMBLE and SYNC, as specified in the MPT standard 1327, chapter 3.3.3.1. At the end of the burst the base station BS transmits a burst terminating message BT. Each signalling burst is also marked with the identifier of the transmitting base station.

One or more transceivers, i.e. mobile radio stations (e.g. mobile telephones) MS1, MS2 and MS3 roam freely within the area of the mobile radio system. Each active mobile station MS must be registered with one of the base stations when it roams within the system. In this way the system keeps a register on the rough location of the mobile stations MS for the call set-up procedures. The mobile stations MS are allowed to roam freely from one cell C to another if only they register with the base station BS of the new cell C on transition. The mobile station MS is considered to be active in the cell C when the mobile station has selected the cell in accordance with a predetermined procedure, the

base station BS of the cell has transmitted a signalling burst and the mobile station MS has received the identifier of the base station. This selecting procedure can be based on the signal strength received from the different base stations and to the quality of signalling in view of the mobile station MS.

The mobile station MS is able to transmit signalling messages only when the base station BS of the cell C in which the mobile station is active is signalling simultaneously on the control channel. The mobile station MS is also able to receive signalling bursts from the other base stations, but it is thereby not able to respond to the messages it has received. When the mobile station receives signalling bursts from different base stations sequentially, the signal strength (field strength) and the bit error ratio may vary from one burst to another, whereby it is possible for the mobile station to measure these parameters between subsequent signalling periods of the base station BS with which the mobile station MS is currently registered. For this purpose, at the end of each signalling burst transmitted on the control channel by the base station BS, there is provided data on the length of the period of time available for the measurements of the signal strength of the other base stations before a new signalling burst of the same station. Between the signalling bursts of the current base station, the mobile station MS may also measure other time-shared control channels, if there are any.

In the preferred embodiment of the invention, the base station BS starts the signalling break on the time-shared control channel by transmitting a particular burst terminating message BT to announce

the end of the signalling burst on that particular base station BS and to give the mobile radio stations a permission to measure the signal strength of the adjacent base stations for a given number of time slots in said time-shared control channel. For this purpose, the burst terminating message comprises an N bit data field (e.g. an 8 bit data field) that gives the number of time slots that the mobile radio stations can use for measuring the signal strength of the adjacent base stations.

The mobile station stores the results from the signal strength measurements in a memory by using the base station identifiers obtained with the bursts as indices. Thus each mobile station MS is able to keep a list on the adjacent base stations and their measured signal strengths, being thus able to rapidly change the base station without measurings in a call set-up situation.

The invention is particularly advantageous in a radio system in which the length of each different signalling burst of each base station BS on the control channel can be varied dynamically on the basis of the number of inbound and outbound messages at the base station between minimum and maximum values given to the base station BS in question. The total duration of the burst sequence may thereby also vary. Such a radio system is disclosed in a co-pending PCT Patent Application claiming priority from Finnish Patent Application 905995.

As for the mobile station MS, the control channel signalings mentioned above naturally occur only when the mobile station has no call and listens to the control channel.

The figure and the description related to it are only intended to illustrate the present in-

vention. In its details, the radio system according to the invention may vary within the scope of the attached claims.


Claims:

1. A radio system comprising several fixed radio stations (BS1, BS2, BS3) positioned apart from each other within a coverage area of the radio system, and at least one mobile radio station (MS1, MS2, MS3) signalling with a single fixed radio station at a time, the system further comprising at least one frequency channel serving as a control channel and time-shared between several fixed radio stations for the transmission of control signalling, characterized in that said at least one mobile radio station (MS1, MS2, MS3) measures the signal strength of signalling transmitted by the other fixed radio stations on the same and/or another control channel between the signalling periods of its current fixed radio station (BS1, BS2, BS3), and that at the end of the signalling period of each fixed radio station (BS1, BS2, BS3), information is transmitted on the length of the period of time the mobile station (MS1, MS2, MS3) has for measuring the signalling of the other fixed radio stations before a subsequent signalling period of the same fixed radio station.

2. A radio system according to claim 1, characterized in that the length of the signalling period assigned to each fixed radio station (BS1, BS2, BS3) on said control channel is variable between minimum and maximum values specific for the fixed radio station on the basis of the number of messages signalled to and from the fixed radio station.

3. A radio system according to claim 1 or 2, characterized in that the mobile radio station (MS1, MS2, MS3) comprises a memory for

storing the measuring results for subsequent use in connection with the selection of a new fixed radio station (BS1, BS2, BS3).

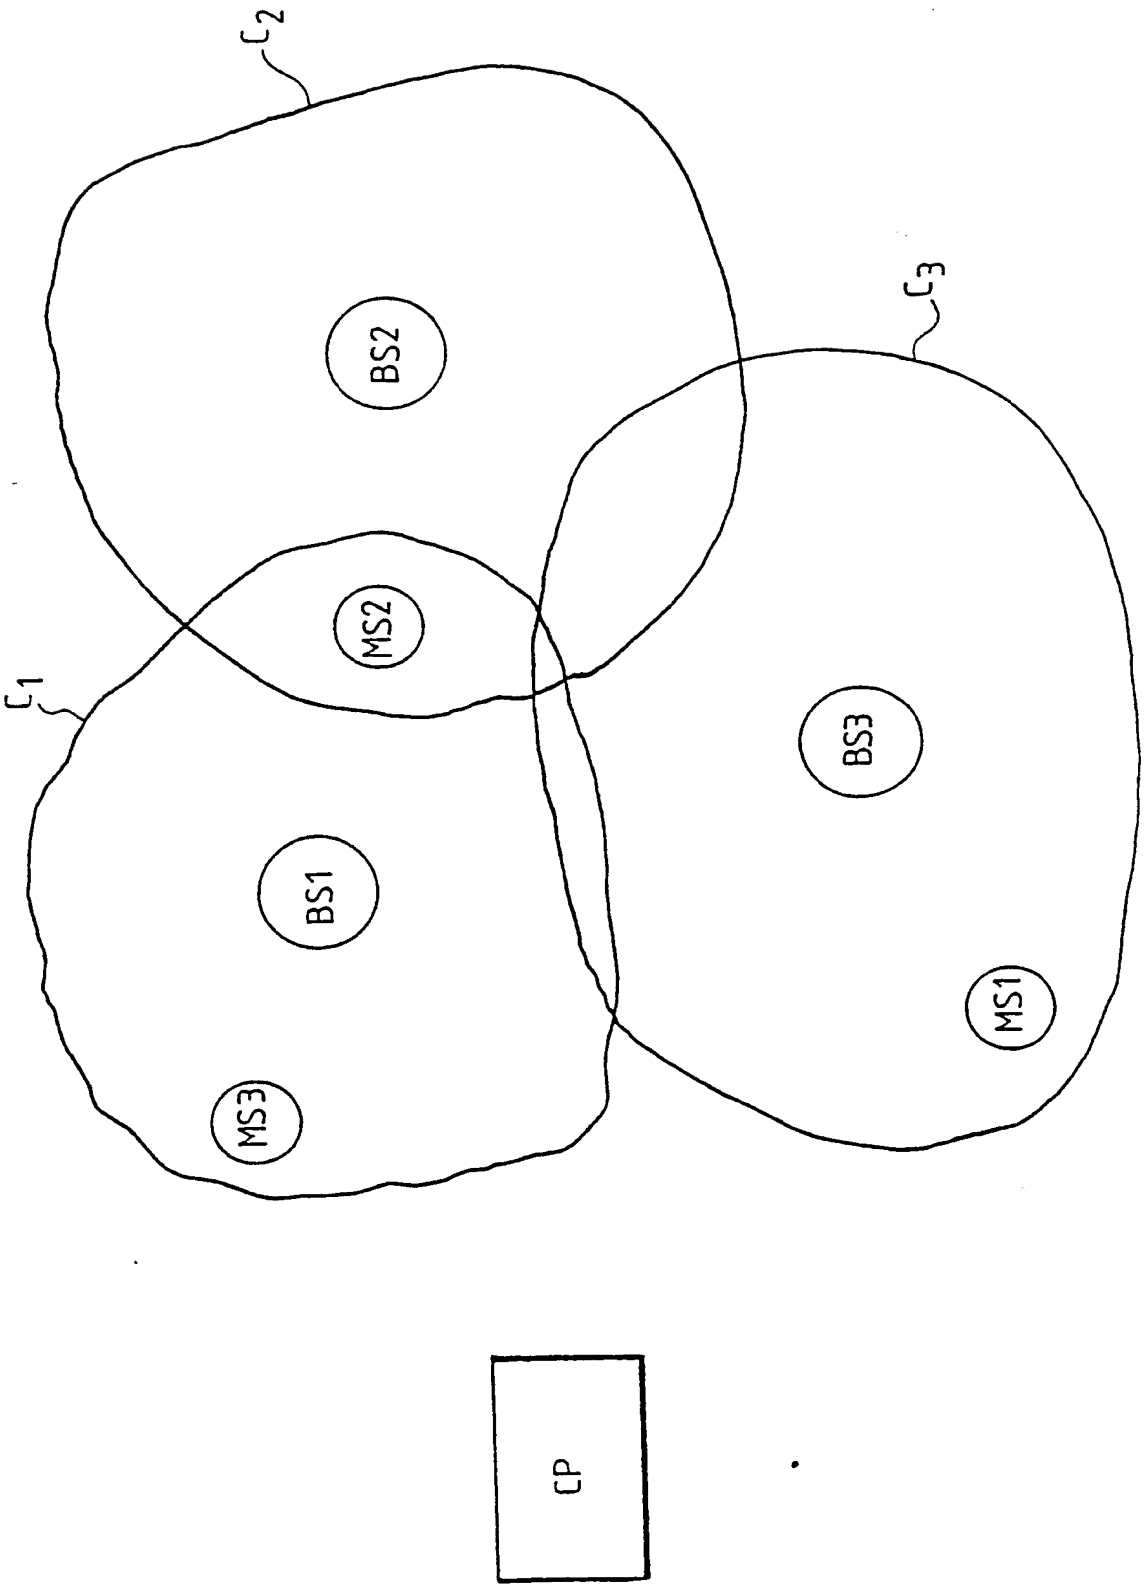

INTERNATIONAL SEARCH REPORT

International Application No PCT/FI 91/00365

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: H 04 B 7/26																	
II. FIELDS SEARCHED <div style="text-align: center; margin-top: 5px;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 20%; border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="padding: 2px;">Classification System</th> <th style="padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px; height: 40px; vertical-align: top;">IPC5</td> <td style="padding: 5px; vertical-align: top;">H 04 B, H 04 J</td> </tr> </table> </td> <td style="border: none;"></td> </tr> </table> <div style="text-align: center; margin-top: 5px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched⁸</div> <p style="margin-top: 10px;">SE,DK,FI,NO classes as above</p>			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="padding: 2px;">Classification System</th> <th style="padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px; height: 40px; vertical-align: top;">IPC5</td> <td style="padding: 5px; vertical-align: top;">H 04 B, H 04 J</td> </tr> </table>	Classification System	Classification Symbols	IPC5	H 04 B, H 04 J										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="padding: 2px;">Classification System</th> <th style="padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px; height: 40px; vertical-align: top;">IPC5</td> <td style="padding: 5px; vertical-align: top;">H 04 B, H 04 J</td> </tr> </table>	Classification System	Classification Symbols	IPC5	H 04 B, H 04 J													
Classification System	Classification Symbols																
IPC5	H 04 B, H 04 J																
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; padding: 2px;">Category¹⁰</th> <th style="width: 70%; padding: 2px;">Citation of Document,¹¹ with indication, where appropriate, of the relevant passages¹²</th> <th style="width: 20%; padding: 2px;">Relevant to Claim No.¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">EP, A2, 0318033 (NEC CORPORATION) 31 May 1989, see column 1, line 55 - column 2, line 14 --</td> <td style="text-align: center; vertical-align: top;">1-3</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">US, A, 4765753 (WERNER SCHMITD) 23 August 1988, see column 2, line 7 - line 25 --</td> <td style="text-align: center; vertical-align: top;">1-3</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">US, A, 4527284 (KLAUS RÖTTGER) 2 July 1985, see column 1, line 57 - column 2, line 14 --</td> <td style="text-align: center; vertical-align: top;">1-3</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">US, A, 4633509 (STEFAN SCHEINERT) 30 December 1986, see the whole document --</td> <td style="text-align: center; vertical-align: top;">1-3</td> </tr> </tbody> </table>			Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	EP, A2, 0318033 (NEC CORPORATION) 31 May 1989, see column 1, line 55 - column 2, line 14 --	1-3	A	US, A, 4765753 (WERNER SCHMITD) 23 August 1988, see column 2, line 7 - line 25 --	1-3	A	US, A, 4527284 (KLAUS RÖTTGER) 2 July 1985, see column 1, line 57 - column 2, line 14 --	1-3	A	US, A, 4633509 (STEFAN SCHEINERT) 30 December 1986, see the whole document --	1-3
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³															
A	EP, A2, 0318033 (NEC CORPORATION) 31 May 1989, see column 1, line 55 - column 2, line 14 --	1-3															
A	US, A, 4765753 (WERNER SCHMITD) 23 August 1988, see column 2, line 7 - line 25 --	1-3															
A	US, A, 4527284 (KLAUS RÖTTGER) 2 July 1985, see column 1, line 57 - column 2, line 14 --	1-3															
A	US, A, 4633509 (STEFAN SCHEINERT) 30 December 1986, see the whole document --	1-3															
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>* Special categories of cited documents:¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>																	
IV. CERTIFICATION <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of the Actual Completion of the International Search</td> </tr> <tr> <td style="padding: 5px;">6th March 1992</td> </tr> </table> </td> <td style="width: 50%; border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="padding: 5px; text-align: center;">1992-03-09</td> </tr> </table> </td> </tr> <tr> <td style="border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">International Searching Authority</td> </tr> <tr> <td style="padding: 5px; text-align: center;">SWEDISH PATENT OFFICE</td> </tr> </table> </td> <td style="border: none; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Signature of Authorized Officer</td> </tr> <tr> <td style="padding: 5px;"> <div style="text-align: center;"> LARS HENRIKSSON </div> </td> </tr> </table> </td> </tr> </table>			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of the Actual Completion of the International Search</td> </tr> <tr> <td style="padding: 5px;">6th March 1992</td> </tr> </table>	Date of the Actual Completion of the International Search	6th March 1992	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="padding: 5px; text-align: center;">1992-03-09</td> </tr> </table>	Date of Mailing of this International Search Report	1992-03-09	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">International Searching Authority</td> </tr> <tr> <td style="padding: 5px; text-align: center;">SWEDISH PATENT OFFICE</td> </tr> </table>	International Searching Authority	SWEDISH PATENT OFFICE	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Signature of Authorized Officer</td> </tr> <tr> <td style="padding: 5px;"> <div style="text-align: center;"> LARS HENRIKSSON </div> </td> </tr> </table>	Signature of Authorized Officer	<div style="text-align: center;"> LARS HENRIKSSON </div>			
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of the Actual Completion of the International Search</td> </tr> <tr> <td style="padding: 5px;">6th March 1992</td> </tr> </table>	Date of the Actual Completion of the International Search	6th March 1992	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="padding: 5px; text-align: center;">1992-03-09</td> </tr> </table>	Date of Mailing of this International Search Report	1992-03-09												
Date of the Actual Completion of the International Search																	
6th March 1992																	
Date of Mailing of this International Search Report																	
1992-03-09																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">International Searching Authority</td> </tr> <tr> <td style="padding: 5px; text-align: center;">SWEDISH PATENT OFFICE</td> </tr> </table>	International Searching Authority	SWEDISH PATENT OFFICE	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Signature of Authorized Officer</td> </tr> <tr> <td style="padding: 5px;"> <div style="text-align: center;"> LARS HENRIKSSON </div> </td> </tr> </table>	Signature of Authorized Officer	<div style="text-align: center;"> LARS HENRIKSSON </div>												
International Searching Authority																	
SWEDISH PATENT OFFICE																	
Signature of Authorized Officer																	
<div style="text-align: center;"> LARS HENRIKSSON </div>																	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
A	<p>US, A, 4718081 (THEODORE BREINIG) 5 January 1988, see the whole document</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-----</p>	1-3

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/FI 91/00365**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on 30/12/91. The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP-A2- 0318033	89-05-31	JP-A-	1180134	89-07-18
		JP-A-	1183221	89-07-21
		JP-A-	1238329	89-09-22
		JP-A-	1141422	89-06-02

US-A- 4765753	88-08-23	AU-B-	593619	90-02-15
		AU-D-	6978287	87-09-10
		CA-A-	1272816	90-08-14
		DE-A-	3607687	87-09-10
		EP-A-	0241954	87-10-21
		JP-A-	62213435	87-09-19

US-A- 4527284	85-07-02	DE-A-	3200965	83-07-21

US-A- 4633509	86-12-30	AU-B-	574055	88-06-30
		AU-D-	2243883	84-06-21
		CA-A-	1230384	87-12-15
		DE-C-	3246741	84-07-05
		EP-A-B-	0111972	84-06-27
		JP-A-	59139736	84-08-10

US-A- 4718081	88-01-05	NONE		

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)